

Function

	GM1365	GM1366
High and low limit alarm	√	√
Maximum/minimum display	√	√
Record storage function	√	√
USB transfer function	√	√
Sampling period, data storage interval, alarm value can be set	√	√
Measurement data analysis	√	√
Battery reminder	√	√
With high-sensitivity sensor, quick response and high precision	√	√
Small size, easy to carry	√	√
Dustproof and waterproof, resist moisture	√	√
Temperature measurement	√	√
Humidity measurement	√	×

Specification

	GM1365	GM1366
Temperature measurement range	-30~80°C	
Humidity measurement range	0~100%RH	×
Memory size	32256	61440
Power	1/2AA 3.6V Lithium Battery	
Size	126*28*22mm	
Weight	49g	


Application



Medical/Pharmaceutical



Fiber spinning





Biochemical laboratory



Agricultural research



Bottom sensor

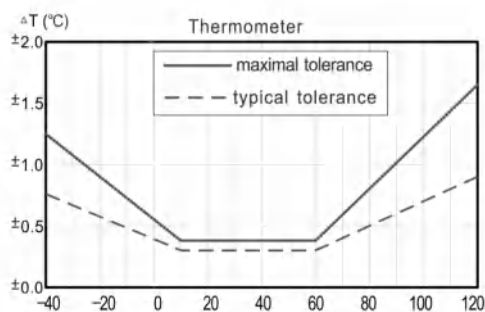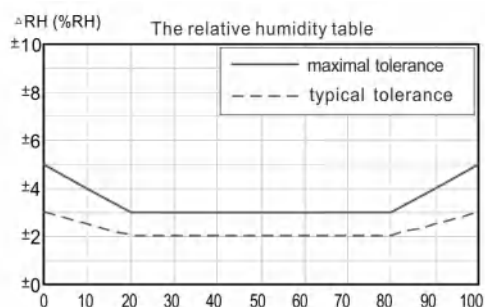

Measurement data analysis interface



CD



USB port



Battery bay

- ☒ GM1365
- ☒ GM1366

ติดต่อบริษัท เนโอเนิกส์ จำกัด

Tel: 098-479-5684 หรือ 061-8268939

E-mail: sale@neonics.co.th หรือ sale@tools.in.th